




HSF

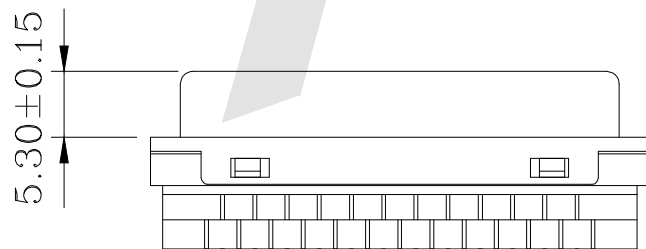

ROHS

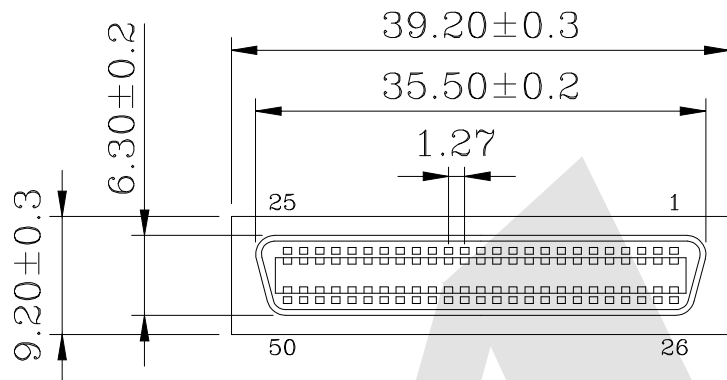

• MATERIALS:(RoHS Compliant)

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated Over Copper

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C


Ordering Code:

HPCNS - 50 - F - M - 3
① ② ③ ④ ⑤

- ① Series No: ④ BRACKET FINISHES:
M=Molded Type(Without Hood)
- ② Contact NO. :
50=50P
- ③ Contact Type:
F:Female
- ⑤ Contact Plating:
1: Gold Flash Selective Plating
3: 5u" Gold Selective Plating
5: 15u" Gold Selective Plating
7: 30u" Gold Selective Plating

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW Jack Bao DATE 9/18/2018
CHECK Bob Yang DATE 9/18/2018



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 1.27mm Series 50P Cable Receptacle Connector
Solder Molded Ribbon Type

DRAWING NO: HPCNS-50FM3

PRODUCT NO: HPCNS-50FM3

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		