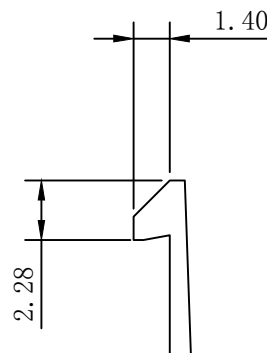


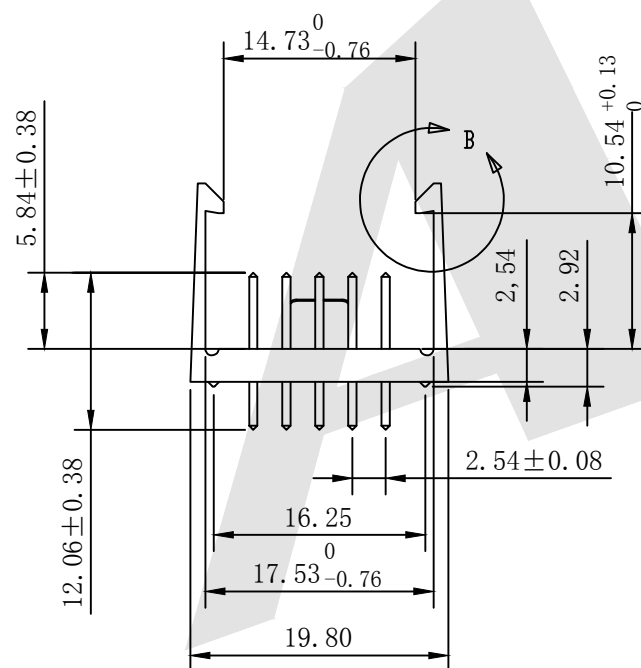


HSF

DETAIL B
SCALE 4:1

NOTES:

1) INSULATOR:GLASS FILLED NYLON;UL 94V-0.

2)CONTACT:COPPER ALLOY.

3)PLATING:

-15 MICROINCH GOLD ON MATING AREA.

-100 MICROINCH SOLDER ON PCB TAIL.

-50 MICROINCH NICKEL UNDERPLATE.

4)COLOR:BLACK.

Ordering Code:

LHDS06 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

06 08 10 12

14 16 18 20

24 26 30 34

40 50 60 64

③ Contact Plating:

G0:Gold flash S0:Selective

G1:3U" Gold S1:Selective 3u"

G2:5u" Gold S2:Selective 5u"

G3:10u" Gold S3:Selective 10u"

G4:15u" Gold S4:Selective 15u"

G5:30u" Gold S5:Selective 30u"

SN:Tin

④ Color Insulator

B:Black

U:Blue

G:Gray

⑤ Insulator Material

A:PBT

B:PA6T

C:LCP

D:PA46

E:PA9T

⑥ Packing

A:Tray

B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20

X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

YG ZHONG

DATE

01/05/2016

CHECK

BobYang

DATE

01/05/2016



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

2.54mm Latch header 2X5P, Straight type
Dip=3.3mm

DRAWING NO: LHDS06-X-X-X-X

PRODUCT NO: LHDS06-X-X-X-X

REV

DESCRIPTION

DATE